


	Manual				Mono-command				Motorized															
	MIN	MAX	M X X	m ²	MIN	MAX	M X X	m ²	MIN	MAX	M X X	m ²												
Wood	Wand (standard)				22	240	250	4,0	Chain				22*	240	250	2,2	Motor 24 V DC				47	240	250	3,7
	Wand (standard)				22	180	250	4,0	Crank				33	240	250	3,0								
Bamboo	Wand (standard)				22	180	250	4,0	Chain				22*	180	250	2,5	Motor 24 V DC				47	180	250	4,5
	Wand (standard)				22	180	250	4,0	Crank				33	180	250	3,5								

*Minimum width - please ask

Price in the table includes blind with: straight wooden valance, ladder string, brackets type A, lifting with cord, tilting with wooden wand. Brackets type B and C are available on order without surcharge. Below 36,9 cm of width wand and cord (slat lifting) are always on the opposite sides of a head rail. Crank control is equipped with end position brake.

Chain mechanism is available in the following colours: white, black, grey, brown, ivory, caramel.

Possibility to use non-drilling brackets - see "Additional accessories" section.



Vario



Blind is installed by the window glass, aluminium valance acts as valance. Available in colours: white (RAL 9010), silver (RAL 9006) and wood-like with texture of: golden oak, walnut, cherry and mahogany. Minimum depth of the glazing bead is 18 mm, under this value 4 mm spacer must be used, available on order without surcharge. Option offered with surcharge.

Corner brackets



Blind is installed by the glass using clear corner brackets. Head rail is covered by 50 mm wood/bamboo slat. Minimum depth of the glazing bead is 18 mm, under this value 4 mm spacer must be used, available on order without surcharge. Option offered without surcharge.

Side guidance



Blind equipped with a perlon coated steel wire. Option offered with surcharge.

Side valance




Side valance is a decorative element of the blind, covering not only the front but also the sides of the head rail. Side valance is wider than the head rail. In one sided version it is 1,3 cm wider; in two-sided version it is 2,6 cm wider. Two-sided option is not available with chain control. Option offered with surcharge.

Hold down bracket



Hold down bracket allows locking the bottom rail, i.e. when installing on a tilting window. Option offered with surcharge. Other installation options - see additional accessories section.

Ladder tape

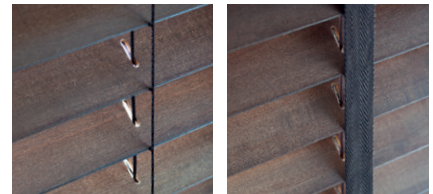

Standard ladder string is replaced by a standard ladder tape. Ladder width equals 13 mm. Option not available with chain, crank or motor control. Option offered without surcharge.

Head rail brackets



type A - universal (standard)



type B - ceiling



type C (clear/white)



type D - adjustable 80/120 (zinc coated/colour)



side brackets



Vario

Tension brackets



type A (colour)



type B (colour)



type C (clear)



type D (clear)

Hold down bracket



metal (colour)



clear