



Type	Minimum dimensions		Maximum dimensions Option 1		Maximum dimensions Option 2		Available fabric types	System colours				Fitting	
	(W) MIN	(H) MIN	(W) MAX	(H) MAX	(W) MAX	(H) MAX		PF	white	brown RAL 8028	anthracite RAL 7016	anodized	vertical
PV1	20	20	150	150	120	220	PF						
PV2	20	20	120	160			HC	cream RAL 1014	swamp oak	golden oak	walnut		
								mahogany	winchester				


**i** Standard includes blind type PV1 with profiles in white, brown, cream or anodized.

**!** Over 120 cm of width 18 mm profile is being used.  
 Over 130 cm of width middle snap mechanism is recommended.  
 For side guidance (steel wire) only 18 mm profile is being used.  
 PV2 type is dedicated to the skylight windows. Above 80 cm of width side guidance is recommended.  
 PV2 side guides are available in cream or anodized.


**X** Possibility to use non-drilling tension shoes

**+** additional profile handle (2 pcs)  
 side guidance - steel wire  
 face fix bracket (set)  
 non-drilling installation type C  
 non-drilling installation type D, E  
 non-drilling installation type F  
 operating rod (0-100 cm)  
 operating rod (100-200 cm)

PV1

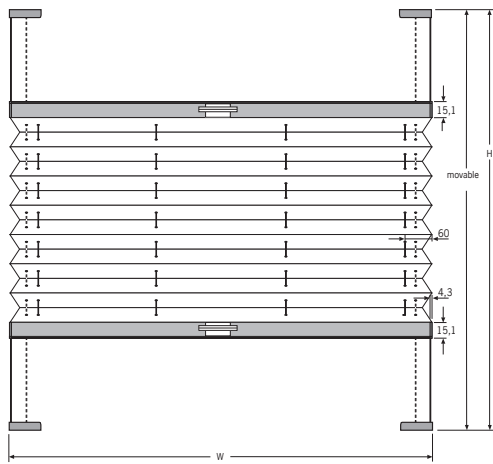

PV2

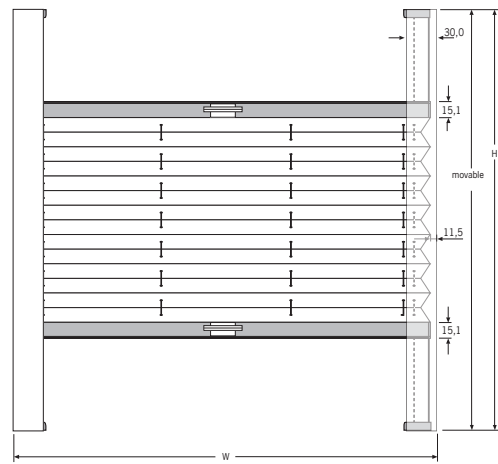


Blind height / Package height

PV1

PV2

50 cm	5 cm	50 cm	5 cm
100 cm	6 cm	100 cm	6 cm
150 cm	7 cm	150 cm	7 cm
200 cm	8 cm	200 cm	8 cm
220 cm	9 cm	220 cm	9 cm

Profile

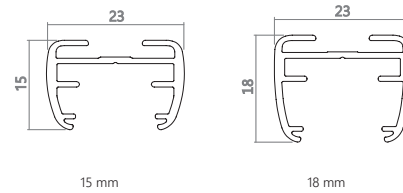

Operating rod




Colour guide

profile	plastic components
white	white
brown	brown
anthracite	anthracite
anodized	grey
cream	cream
swamp oak	brown
golden oak	oak
walnut	brown
mahogany	brown
winchester	oak


Handle



Tension shoe

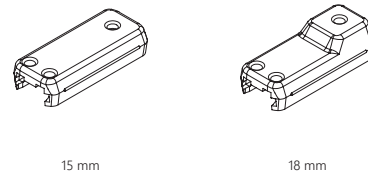

Side guides



bit.ly/PB\_VS

Installation



type A - into the glass (standard)

type B - frontal

type C - non-drilling

type D - non-drilling

type E - non-drilling

type F - non-drilling