



	Manual				Mono-command				Motorized			
	MIN	MAX	M X X	m ²	MIN	MAX	M X X	m ²	MIN	MAX	M X X	m ²
16 mm	Wand (standard)				Crank				Motor 24 V DC			
	17	200	250	5,0	33	200	250	4,0	51	200	250	5,0
	Monomagic				Chain							
	37	120	250	2,5	22*	200	250	4,0				
25 mm	Wand (standard)				Crank				Motor 24 V DC			
	17	298	250	5,0	33	298	250	4,0	47	298	250	7,5
	Monomagic				Chain							
	37	120	250	2,5	22*	280	250	4,0				

*Minimum width - after consultation

i Price in the table includes blind with: brackets type A, lifting with cord, tilting with plastic wand. Brackets type B and C are available on order without surcharge. Below 36,9 cm of width wand and cord (slat lifting) are always on the opposite sides of a head rail. Crank control is equipped with end position brake

! Chain mechanism is available in the following colours: white, black, grey, brown, ivory, caramel.

X Possibility to use non-drilling brackets - see "Additional accessories" section.

Monomagic



Integrated tilting and brake mechanism. Cord runs within the wand. Automatic brake of the blind when lifting. Loosing the brake is achieved by pulling the wand. Option offered with surcharge.

Hold down bracket



Hold down bracket allows locking the bottom rail, i.e. when installing on a tilting window. Option offered with surcharge. Other installation options - see additional accessories section.

Side guidance



Blind equipped with a perlon coated steel wire. Option offered with surcharge.

Between the glass



Blind controls are guided outside of the window frame. Tilting by wand lifting by cord. Between the glass accessories are available only in white and dark brown. Option offered without surcharge.

Partition walls



Blind is adapted for installation within the partition wall. No lifting option. Tilting is achieved using a knob installed on the frame of the partition wall. Option offered with surcharge.

Vario




Blind is installed by the window glass, aluminium valance acts as valance. Available in colours: white (RAL 9010), silver (RAL 9006) and wood-like with texture of: golden oak, walnut, cherry and mahogany. Minimum depth of the glazing bead is 18 mm, under this value 4 mm spacer must be used, available on order without surcharge. Option offered with surcharge.



Blind is installed by the window glass, aluminium profile acts as valance. Available in white colour (RAL 9010). Option offered with surcharge.

LUX option

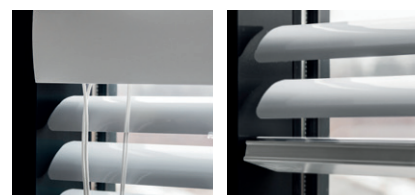

Standard blind is equipped with wooden components: valance, bottom rail, wand and tassels. Wooden components colours see 25 mm colour selector. Side valance is wider than the head rail. In one sided version it is 1,3 cm wider; in two-sided version it is 2,6 cm wider. Two-sided option is not available with chain control. Option offered with surcharge.

Head rail brackets



Hold down bracket clear



type A - universal (standard)



type B - ceiling



type C (clear/white)



type D - adjustable 80/120 (zinc coated/colour)



Vario

Tension brackets



type A (colour)



type B (colour)




type C (clear)



type D (clear)

System dimensions

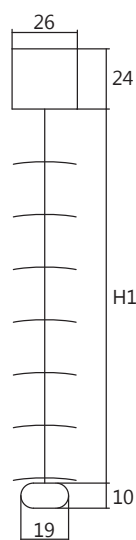

H1 - approximate height of a closed blind
 H2 - approximate height of an opened blind

16 mm:
 H2 = 3,2 cm per 1 m of height

25 mm:
 H2 = 2,2 cm per 1 m of height