



Type	Minimum dimensions		Maximum dimensions Option 1		Maximum dimensions Option 2		Available fabric types	System colours				Fitting	
	(W) MIN	(H) MIN	(W) MAX	(H) MAX	(W) MAX	(H) MAX		PF	white	brown RAL 8028	anthracite RAL 7016	anodized	vertical
PV1	20	20	150	150	120	220	PF						
PV2	20	20	120	160			HC	cream RAL 1014	swamp oak	golden oak	walnut		
								mahogany	winchester				


i Standard inkluderar persienn typ PV1 med profiler i vitt, brunt, krämfärgat eller eloxerat.

! Över 120 cm bred 18 mm profil används. För sidostyrning (ståltråd) används endast 18 mm profil. PV2-typ är tillägnad takfönster. Över 80 cm bred sidostyrning rekommenderas. PV2 sidostyrningar finns i krämfärgade eller anodiserade.


X Possibility to use non-drilling tension shoes - see „Additional accessories” section.

+ extra profilhandtag (2 st)
sidostyrning - ståltrådsfäste (set)
icke-borrande installation typ C
icke-borrande installation typ D,
E icke-borrande installation typ F
manöverstång (0-100 cm)
manöverstång (100-200 cm)

PV1

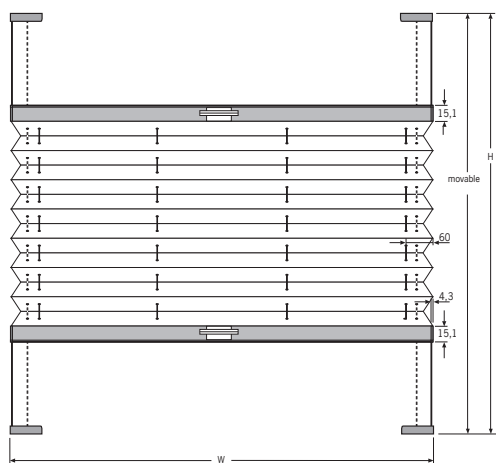

PV2

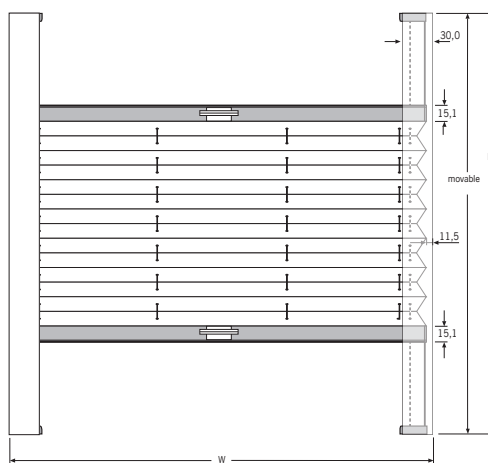


Persiennhöjd / Pakethöjd

PV1

PV2

50 cm	5 cm	50 cm	5 cm
100 cm	6 cm	100 cm	6 cm
150 cm	7 cm	150 cm	7 cm
200 cm	8 cm	200 cm	8 cm
220 cm	9 cm	220 cm	9 cm

Profiler

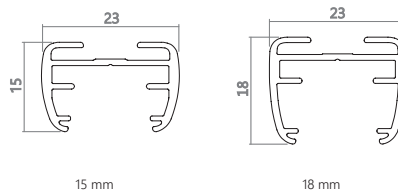

Handtag med skaft




Färg guide

profile	plastic components
white	white
brown	brown
anthracite	anthracite
anodized	grey
cream	cream
swamp oak	brown
golden oak	oak
walnut	brown
mahogany	brown
winchester	oak


Handtag



Uppspännings fästen

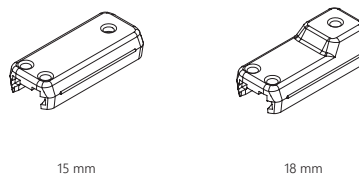

Sidoskenor



Installation

